


# Why SKF?

# Belts

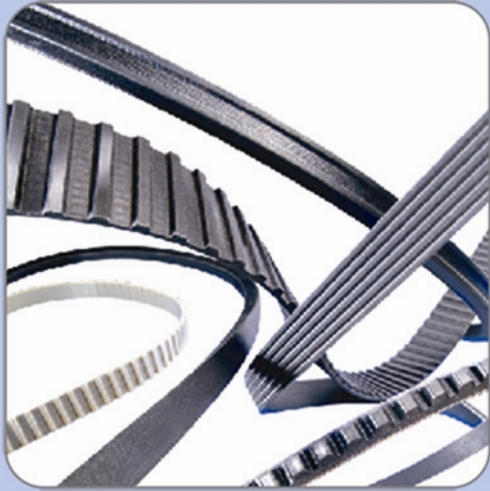

SKF supplies a full range of V belts and timing belts for use in all industries. The manufacture of the belt products is in strictly controlled environment with modern mixing and curing facilities. The testing of the belts is done on ISO tested machinery to conform to the RMA and ISO standards for length and batch tolerance, with V belts also conforming to antistatic standards for ISO 1813. The materials for the belts are also heat resistant, with an operating range of  $-30$  to  $70$  °C.

The V belt assortment is enhanced with the addition of the range of SKF Xtra (XP) wedge and narrow wedge belts for extra performance. This range gives SKF belt users options for increased life or more compact drives, solving problems in tough applications and environments. The new XP range derives the performance increase from a special manufacture method, with high performance internal materials, giving at least 20% power increase over the equivalent size of a standard SKF wedge or narrow wedge belt.

## Product features

- Oil and heat resistance/anti-static properties meet and exceed industry standards
- Globally sourced rubber along with stringently controlled tension members provide the superior performance expected from SKF
- Timing belts made of polyurethane with steel cords are also available
- State-of-the-art electronic rubber blending/mixing processes maintain the superior quality
- Tight tolerance stability during the manufacturing process along with superior raw material eliminates the requirement to match individual belts to a single drive

## User benefits

- Enhance worker safety
- Improve hygiene
- Improve product quality
- Improve reliability
- Increase production
- Reduce downtime
- Reduce energy consumption
- Reduce maintenance costs
- Reduce need for maintenance
- Reduce operating costs
- Reduce waste
- Shorten delivery times

## Common applications

- Centrifuges
- Conveyors
- Crushers
- Drills
- Fans
- Horizontal mills
- Loaders
- Motors
- Pumps
- Screens



### Cogged raw edge wedge/narrow belts



- Higher power rating and stronger design compared to classical V belts
- Oil and heat resistance/anti-static properties meet and exceed industry standards
- Globally sourced rubber along with strictly controlled tension members provide superior performance
- State-of-the-art electronic rubber blending/mixing processes maintains the superior quality

### Cogged raw edge classical V belts




- Oil and heat resistance/anti-static properties meet and exceed industry standards
- Globally sourced rubber along with strictly controlled tension members provide superior performance
- State-of-the-art electronic rubber blending/mixing processes maintains the superior quality

### Ribbed belts



- Handle tough drive conditions such as large transmission ratios, high belt speeds and small pulleys
- Provide smooth operation and resistance to belt vibration
- Globally sourced rubber along with strictly controlled tension members provide superior performance
- State-of-the-art electronic rubber blending/mixing processes maintains the superior quality

### Variable speed belts

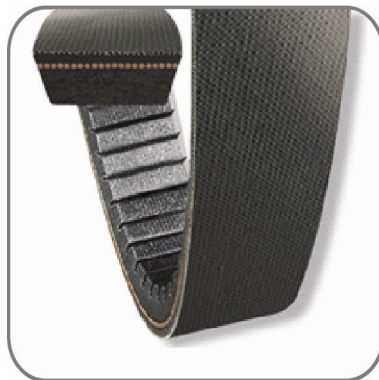

- Suitable for equipments that require a wider range of speed ratios during operation
- Oil and heat resistance/anti-static properties meet and exceed industry standards
- Globally sourced rubber along with strictly controlled tension members provide superior performance
- State-of-the-art electronic rubber blending/mixing processes maintains the superior quality

© SKF is a registered trademark of the SKF Group.

© SKF Group 2009

The contents of this publication are the copyright of the publisher and may not be reproduced (even extracts) unless permission is granted. Every care has been taken to ensure the accuracy of the information contained in this publication but no liability can be accepted for any loss or damage whether direct, indirect or consequential arising out of the use of the information contained herein.

August 2009

[skf.com](http://skf.com)

